


PC400/500 TRACTION HOIST

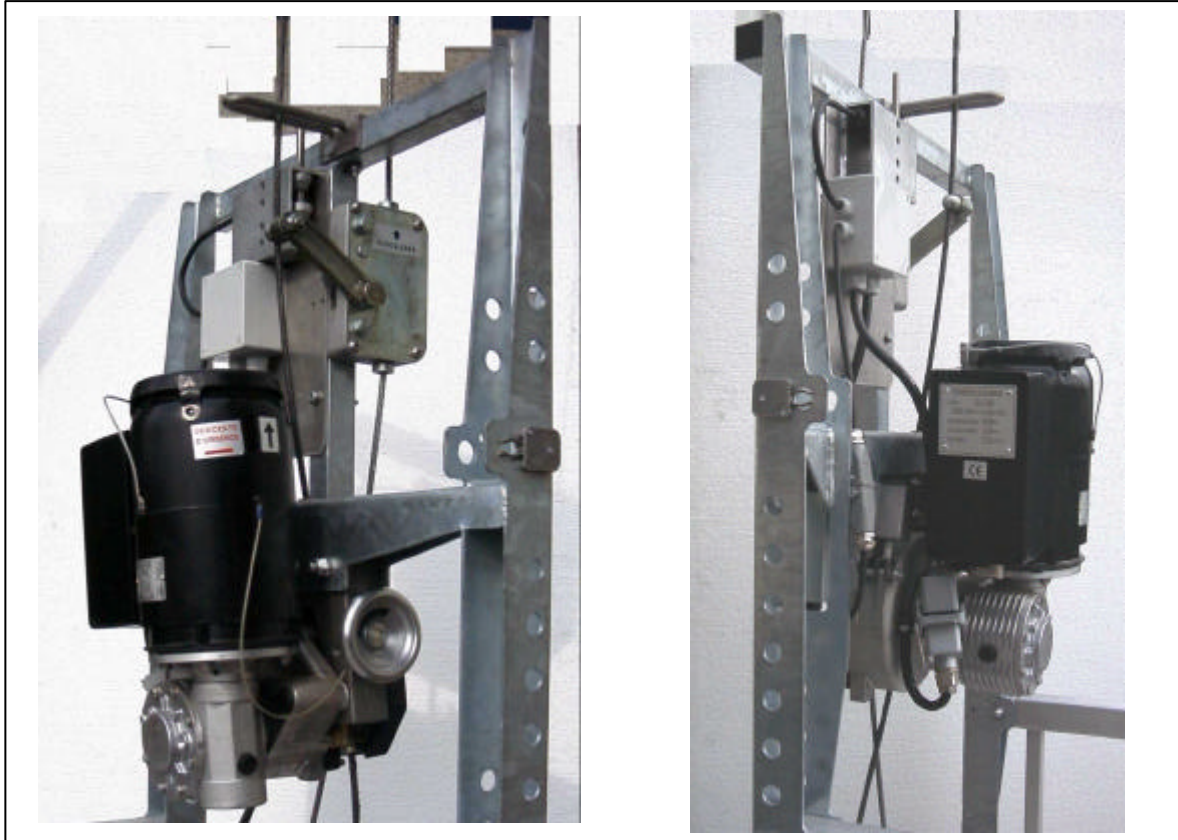

Model	Electric Motor	Capacity	Current (Amps)	
			Running	Starting
PC401-50	Single phase-220V-50Hz-0.74 kW	400 kg	5.0	20.0
PC403-50	Three phase-380V-50Hz-0.74 kW	400 kg	2.5	7.5
PC503-50	Three phase-380V-50Hz-0.88 kW	500 kg	2.5	7.5

Standard features

- Self reeving traction hoist
- Load dependant traction system
- Slack rope safety device
- Electro-mechanical service brake
- 'No Power' emergency descent system.
- Climbing speed: 8.0 m/min.
- Self weight (hoist only): 30 kg
- Safety rope and suspension cable:
Ø 8.4 mm

Central Control Box


- Hold to run 'up/down' operating buttons
- Emergency stop
- Hoist selector switch (left/both/right)
- 220V plug outlet for hand-tools
- Phase protector for three phase hoist

Note

- Hoist must be used with central control box

Optional

- Top limit switch
- Overload detection device

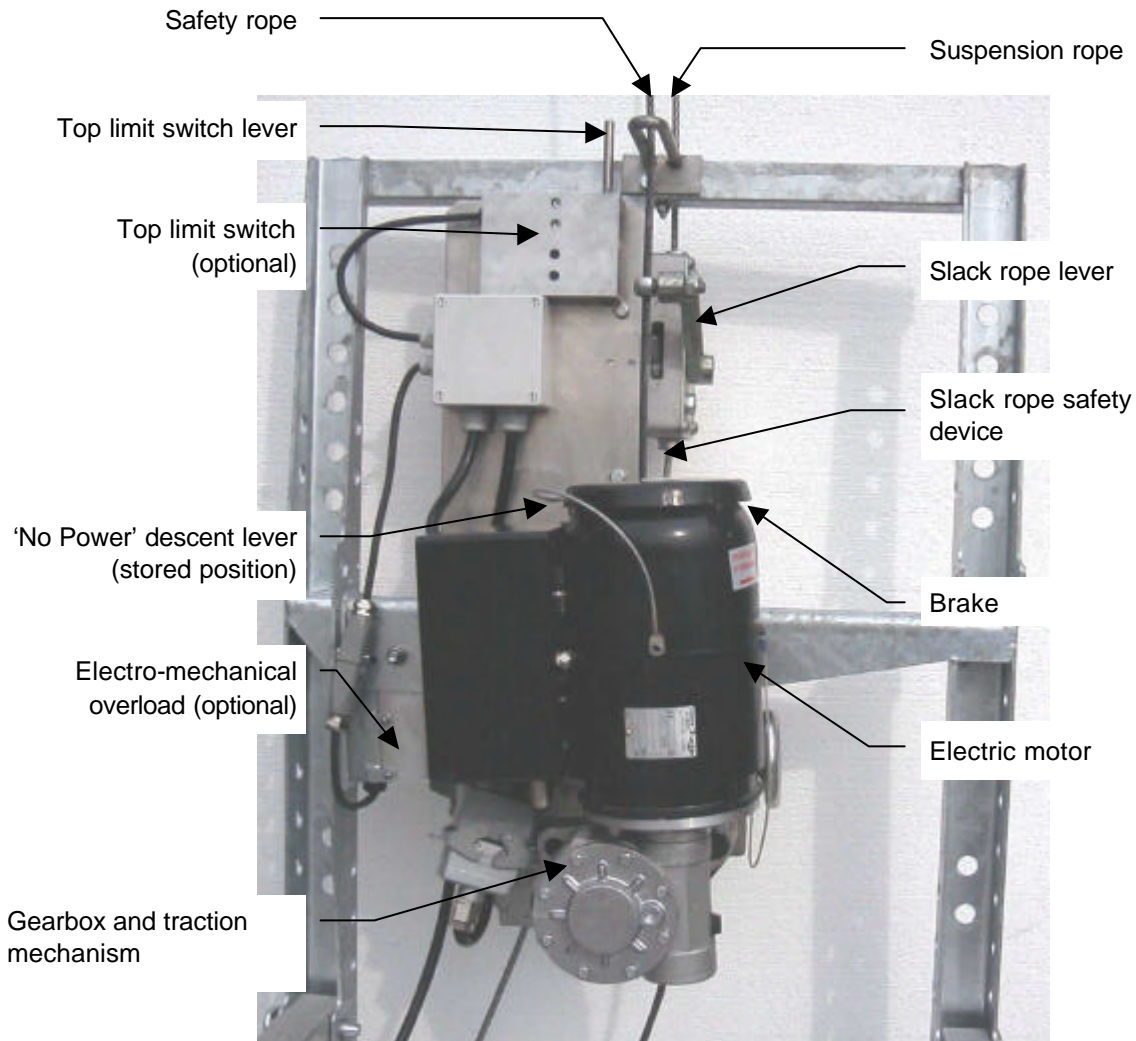

Ref.: 38122-01-B	Issue Date: 23-june-2003
POWER CLIMBER bvba Tel: +32-3-451.05.00 Fax: +32-3-451.05.01 E-mail: Info@PowerClimber.be	POWER CLIMBER ASIA Ltd. Tel: +852-2310.2855 Fax: +852-2745.0755 E-mail: Infopcal@PowerClimber.com.hk
Website: www.PowerClimber.be	

This document and all copies are property of Power Climber bvba. All dimensions and data are indicative only. The user must ensure that the equipment complies with local rules and regulations.