


BMU WORKCAGE - ASTRO hoist

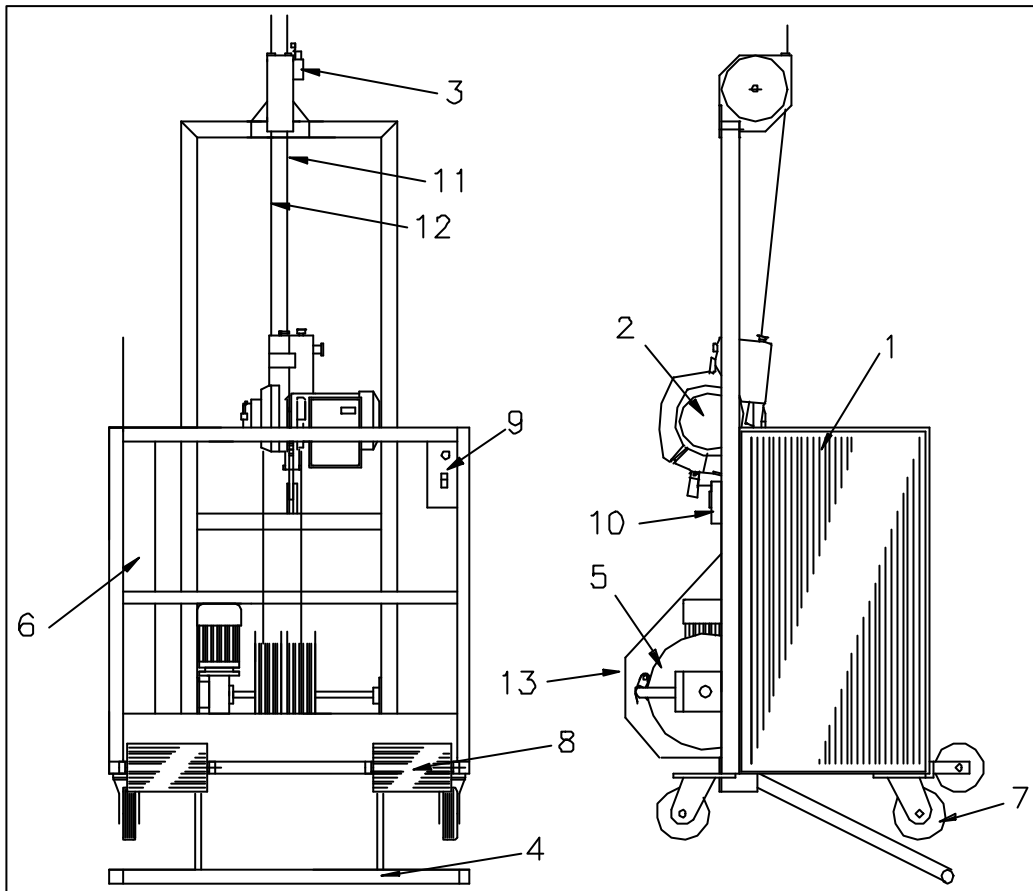

Standard features:


- Light weight aluminium construction
- Side cladding (solid aluminium plate) (1)
- Powered by ASTRO hoist with thermal protection (2)
- Power supply: 3x415V+Neutral +Earth, three phase, 50Hz
- **Two** built-in safeties:
 - Slack rope safety device
 - Overspeed safety device with electrical interlock
- Top limit switch (3)
- Bottom limit trip bar (4)
- Electro-mechanical overload detection device (10)
- 'No Power' emergency descent system
- Twin-drum wire winders up to 75m (5)
- External protection bar for wire winder
- Toe-board protection for wire winder
- Cable bin (6)
- Low-noise castor wheels Ø125 (7)
- Non-marking soft wall rollers (8)
- Climbing speed: 8.5 m/min.
- Safety (11) and suspension rope (12):
Ø 8.4mm (52.3kN)

Central Control Box: (9)

- Hold to run 'up/down' operating buttons
- Emergency stop
- Bottom trip bar bypass button
- Overload warning light
- 'Power-on' indicator light
- Thermal protector for wire winder motor
- Hour Meter
- Phase Protector
- 230V control circuit

Optional

- Long drop up to 125m
- Telescopic wall rollers
- RAL painting
- Controls for monorail trolleys
- Low Voltage Control Circuit (48V)
- Other power supplies on special request

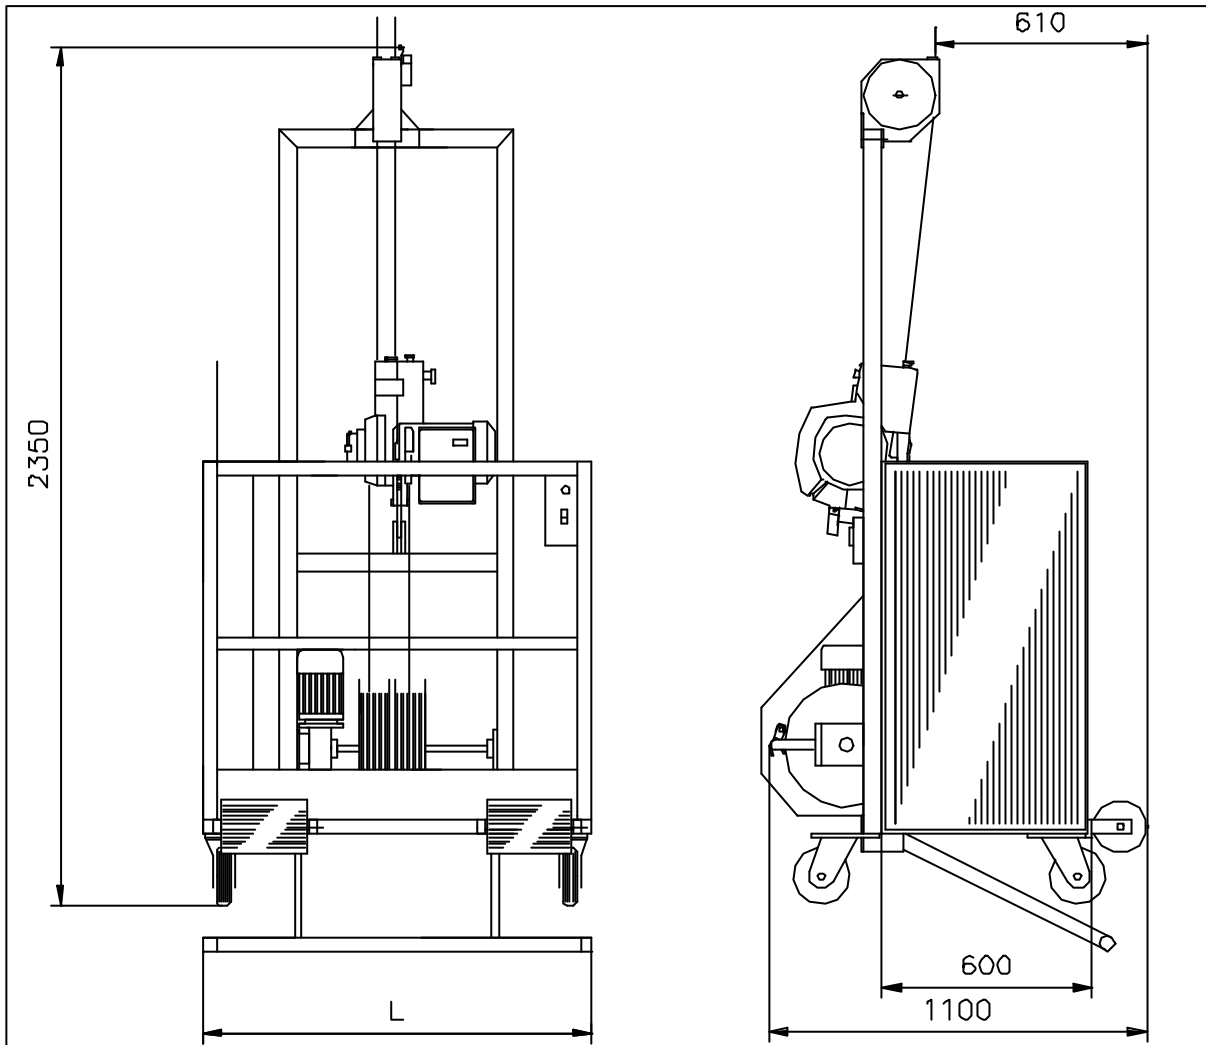

Length (L)	660 mm	1100 mm	1500 mm
Selfweight (1)	150 kg	160 kg	170 kg
Safe Working Load (SWL)	1700 N	1700 N	1700 N
Number of persons	1	1	1

- (1) Selfweight without steel wire rope and power supply cable.
Add 0.85 kg/m for steel wires and power supply cable.

Ref.: 38222-01	Issue Date: 10-okt-2003
POWER CLIMBER bvba Tel: +32-3-451.05.00 Fax: +32-3-451.05.01 E-mail: Info@PowerClimber.be	POWER CLIMBER ASIA Ltd Tel: 852-2310.2855 Fax: 852-2745.0755 E-mail: Infopcal@powerclimber.com.hk
Website: www.PowerClimber.be	

This document and all copies are property of Power Climber bvba. All dimensions and data are indicative only. The user must ensure that the equipment complies with local rules and regulations.